




LED GARAGE CANOPY



Features

- 1.This garage lamp is a special design for application in places like parking garage,car port, driveway,underpass,etc;
- 2.Fins design,advective grooves between fins are good for heat dissipation;
- 3.Professional light distribution technique,high light reflectivity reflectors,140° beam angle available;Light transmission rate of lens is over 90%;
- 4.It complies with UL certification,safe and reliable.

Product Dimension

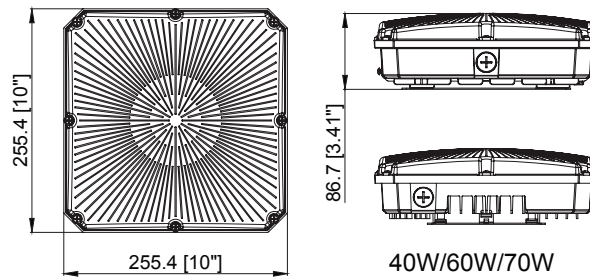


Lighting Parameters

Model Number	BRT-GCL-2-WC-3CCT-UNV-DIM-BRZ	BRT-GCL-2-WC-3CCT-UNV-DIM-WHT
Working Voltage	AC120-277V	
CCT	3000K/4000K/5000K	
Lamp Bead Model	LUMILEDS	
Lighting Efficiency	120LM/W	
Color Rendering Index	Ra>80	
Operating Temperature	-40°F~104°F	
Storage Temperature	-40°F~158°F	
Environment Location	Wet Location	
Life span	≥50000H	
Lamp shell	Brown	White
Accessories options	No sensor function, Photocontrol, Microwave sensor	


Installation Instruction

Ceiling Installation


1. Loosen the screw to take off the mounting plate from the lamp.

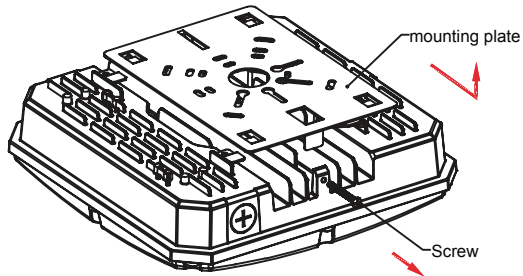


2. Screw the mounting plate to the ceiling.

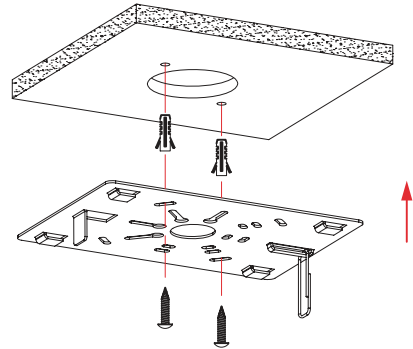


3. Hang the lamp on the ring so as to connect wires with terminal caps.

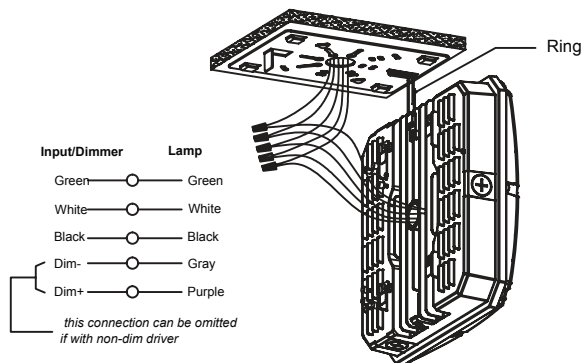

4. Hook up lamp on the mounting plate.

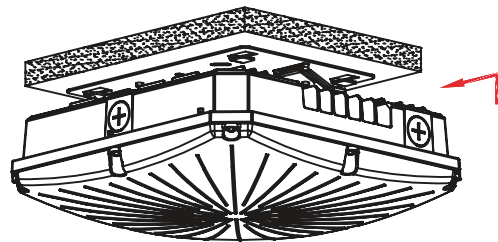


5. Secure the screw. Installation completed.

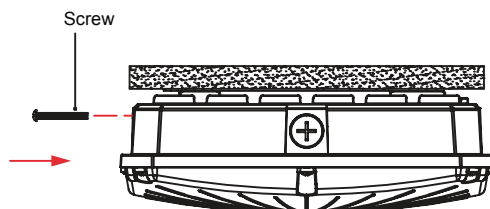


Installation Instruction

Pole-pendant Installation

1. Connecting wires with terminal caps as picture shows.

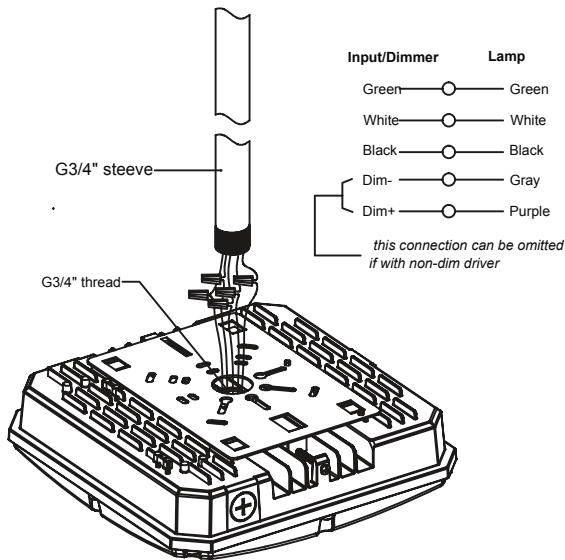


2. Rotating the steeve to make it fixed with lamp. Installation completed.

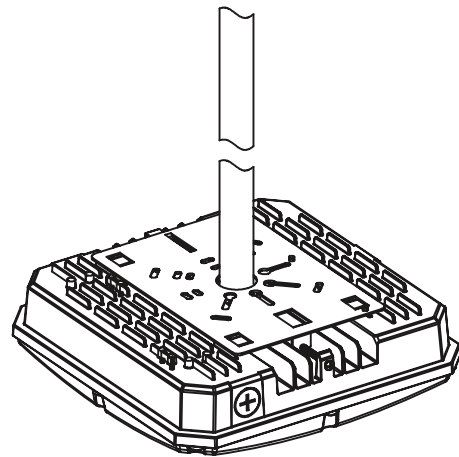



Packing infomation

Power (Size)	Innter box (L*W*H)	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W./Ctn (lbs)	G.W./Ctn (lbs)
10 inch 40W/60W/70W	11.89"*4.65"*12" 302*118*305mm	19.49"*12.48"*12.8" 495*317*325mm	4	23.8	26.6



Applications

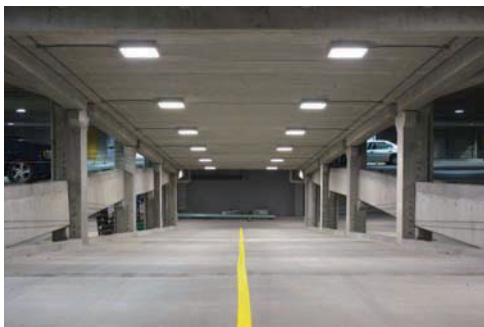

Microwave Motion Sensor

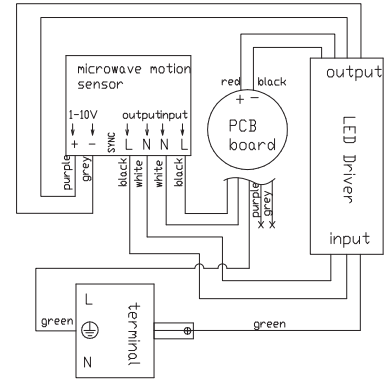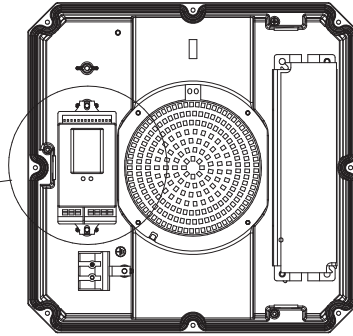

Photoelectric Switch

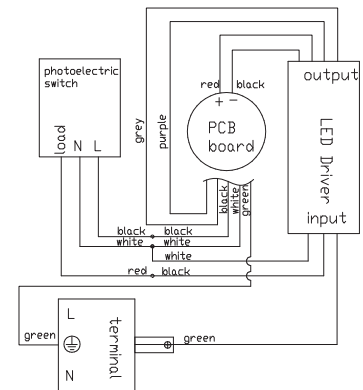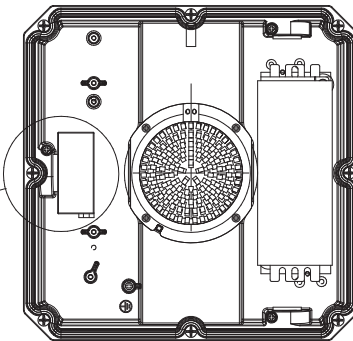

Cautions

1. Only persons qualified for electrical work should carry out electrical work.
2. All wiring should be performed after shutting off electricity or power to the lighting fixture.
3. Do Not disassemble or modify the LED CANOPY LIGHT.
4. Do Not drop the LED CANOPY LIGHT. Take precautions to ensure the LED CANOPY LIGHT does not experience any strong impact.
5. Keep this product Manual in a safe place for reference.
6. The manufacturer and/or the seller will not be held responsible for any damage caused to the LED CANOPY LIGHT by the user(s) during installation .
7. Be sure to ground the fixture.
8. Do Not Handle lamps soon after the light has been turned off.
9. Do Not use theLED CANOPY LIGHT near heating appliances/elements.