



## Watts Selectable UFO High Bay Pro



## Features




1. Simple and stylish appearance.
2. Excellent heat dissipation.
3. DLC 5.1 Premium with high luminous efficacy and low UGR.
4. Branded driver and LED's.0-10V dimming
5. PnP sensor option.
6. Mounting options: hook/chain, pole pendent and surface mounting.
7. Round EM driver for fast installation.
8. Very complete accessories for option.

## Product Dimension




unit:mm

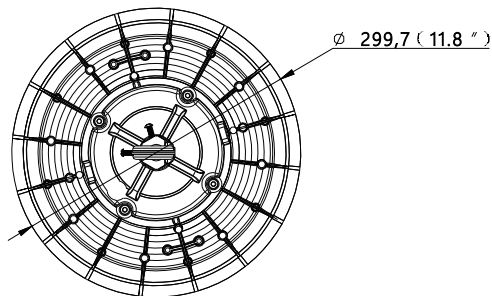

100W/150W/200W

## Rings

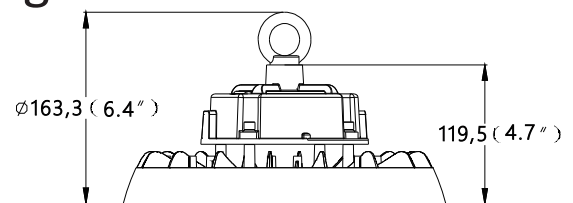


## Lighting Parameters




Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	LED Driver	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp shell
BRT-UFO-03-200-57K-DIM-UNV-SNS	100W/150W/200W	AC 120-277V	5700K	2835	SOSEN	110°	135LM/W	Ra>80	-40°F~122°F -40°C~50°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black

## CCT and Watts selected Operation Manual


1.Remove the rubber pad from the driver

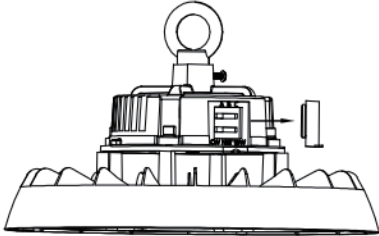

2.Use the slide switch to select wattage

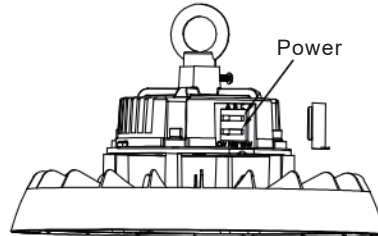

3.Attach the rubber pad to the driver

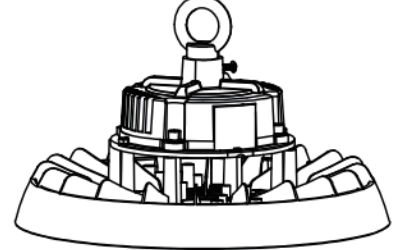


## Installation Instruction




1. Rings type:


1.Tighten the ring clockwise

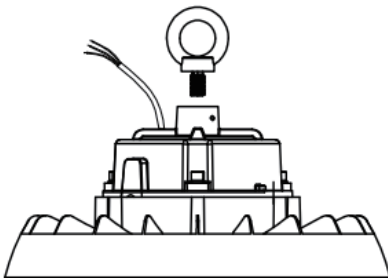

2.Tighten the screw

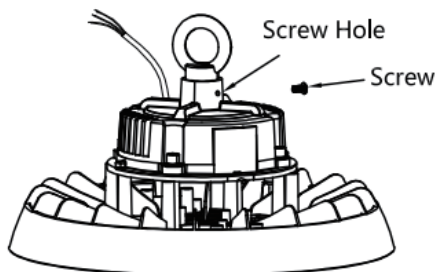


3.Hang the light

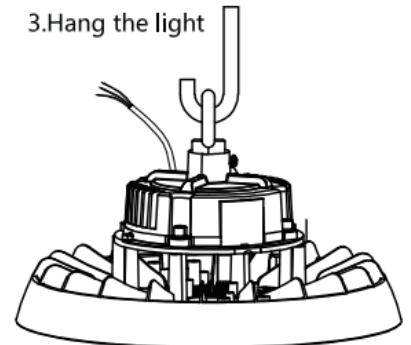

## Installation Instruction


### 1. Rings type:

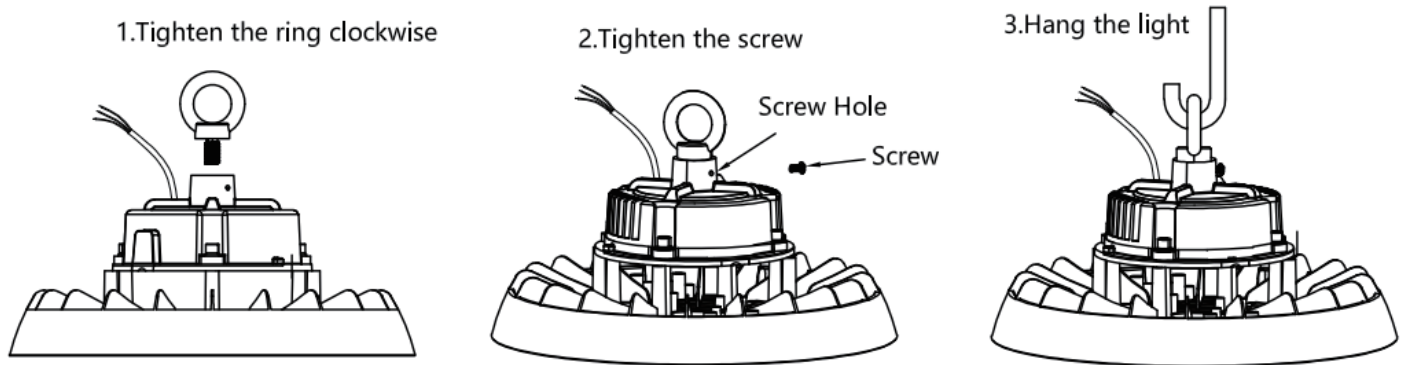

## Wiring Connection

Turn off the power,connect AC wire.Brown wire to L, Blue wire to N,and Yellow/Green wire to E.  
Dimmer connection(with dimmable driver.)

- Compatible with 0-10V dimming.
- Connect wires as below,purple wire is D+, Pinkwire is D-, Black/White wire is 12V

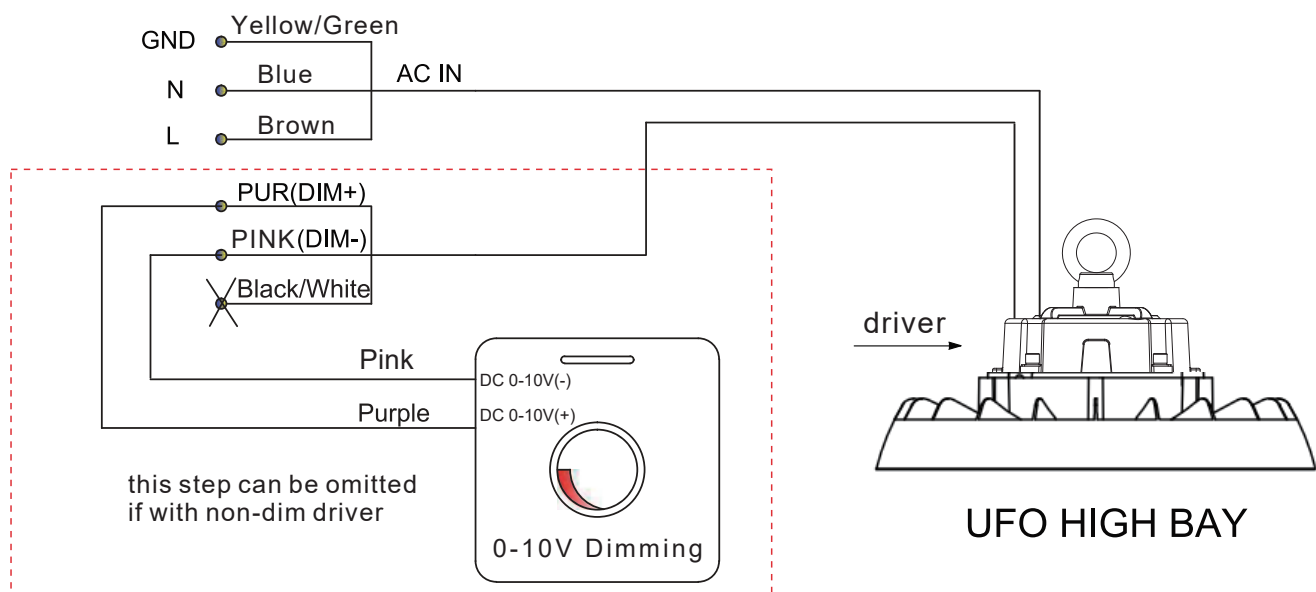

## Packing information

Power	Outer box (L*W*H)	Oty/Ctn (pcs)	N.W./Ctn (kg/lbs)	G.W./Ctn (kg/lbs)	Remarks
200W	14.49"x14.49"x6.97" (368*368*177mm)	1	2.10/4.63	3.25/7.17	2M cable

## Applications



Industrial application:  
Warehouse, Factory etc.



Commercial application:  
Exhibition Room, Gas Station,  
Supermarket etc.

## Note

1. Any form of installation/uninstallation or maintenance and electrical work must only be performed by a qualified electrician.
2. All wiring should be done after cutting off the power.
3. The UFO high bay light must be grounded.
4. Always keep the lens/diffuser of UFO high bay light cleaned to maintain good light transmission.
5. Always keep the shell of UFO high bay cleaned to maintain good heat dissipation.
6. Cleaning must only be done with dry or wet cloth and the high bay should not be exposed to corrosive substance.
7. High voltage inside the fixture, please do not disassemble it, Serious electric shock may occur otherwise.