Catalog #:	Project
Jaraio g " i	

Prepared By: \_\_\_\_\_ Date: \_ \_ Type: \_

# 5CCT 3WATTAGE RETROFIT KIT 4inch **DESCRIPTION**

- This product has 5 levels of adjustable color temperature, 3 levels of adjustable power
- This product emits evenly, without halo and shadow
- The appearance of this product adopts powder spraying, and the color is white, Can be matched with different face ring colors
- The installation method of this product is suitable for 4-inch iron drums
- · This product is suitable for Damp environment




















## **CCT& Wattage Adjustment**




**SWITCH I** Selectable CCT 2700K,3000K,3500K,4000K,5000K

#### **SWITCH II**

Selectable Wattage 8W,10W,12W


#### Installation diagram:
















SPECIFICATION				
Model	BRT-DOB-4WC-1PK-5CCT			
Size	4in			
Shape	Round			
Watts	8/10/12W Selectable			
Light Output(LM)	600/750/860LM			
Color Temperature(K)	5CCT Selectable			
Lifetime	50000H			
The Dimming Mode	Triac Dimming			
Approved Location	Damp Location			
Operating Temp	-20~40°C			
Beam	100°			

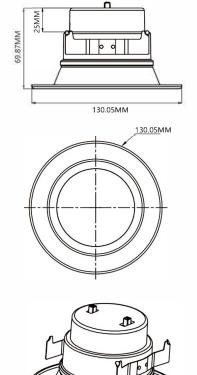

## **Accessories**







# 5CCT 3WATTAGE RETROFIT KIT 6inch

# **DESCRIPTION**

- This product has 5 levels of adjustable color temperature, 3 levels of adjustable power
- · This product emits evenly, without halo and shadow
- The appearance of this product adopts powder spraying, and the color is white, Can be matched with different face ring colors
- The installation method of this product is suitable for 6-inch iron drums
- This product is suitable for Damp environment


















## **CCT& Wattage Adjustment**



# **SWITCH I Selectable CCT**2700K,3000K,3500K,4000K,5000K

#### **SWITCH II**

Selectable Wattage 12W,15W,18W

#### Installation diagram:

















SPECIFICATION				
Model	BRT-DOB-6WC-1PK-5CCT			
Size	6in			
Shape	Round			
Watts	12/15/18W Selectable			
Light Output(LM)	840/1050/1260LM			
Color Temperature(K)	5CCT Selectable			
Lifetime	50000H			
The Dimming Mode	Triac Dimming			
Approved Location	Damp Location			
Operating Temp	-20~40°C			
Beam	100°			



184.5MM



## Accessories



