

### DESCRIPTION

Ultra slim design, lamp thickness only 0.49".  
Features color tunable technology lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.  
IC rated for direct contact with insulation.  
Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms.  
Available size: 4", 6"



### BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
BRT-DUT-SQ-409-5CCT-120	9W		2700K	525Lm
			3000K	561Lm
			3500K	587Lm
			4000K	600Lm
			5000K	588Lm

MODEL#	SIZE	WATTAGE	5CCT	LUMENS
BRT-DUT-SQ-612-5CCT-120	12W		2700K	840Lm
			3000K	870Lm
			3500K	886Lm
			4000K	901Lm
			5000K	876Lm

### TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K   3000K   3500K   4000K   5000K
CRI	90
BEAM ANGLE	120°
MATERIAL	AL+PS
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F ~ 113°F) -20~45 °C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

### FEATURES

- Edge-lit technology, with no glare or dark spots
- Continuous dimming from 100% to 10% with many Triac Dimmers
- Instant on
- No flicker

### INSTALLATION

No existing recessed housing or junction box required.  
Suitable for most new constructions.  
Install J-Box in ceiling beam, and insert light right into drywall opening.

### DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.  
Please check the recommended dimmer list in next page.

### ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

### ENERGY SAVINGS

80% more energy savings than halogen lamps.

### LISTING

ETL Listed. Energy Star.



# Square Slim Panel Series

5CCT Square Slim Panel


Catalog Number :	Project Name :	Note :	Date :	Type :
------------------	----------------	--------	--------	--------

**4inch&6inch** : Easily flip the switch for desired CCT

Products view




## SIZE & DIMENSION & HOLE SIZE

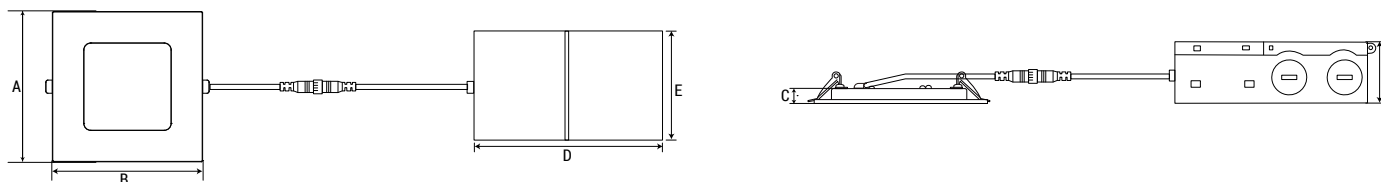

SIZE	A	B	C	D	E	F
4inch	4.96"(126mm)	4.96"(126mm)	0.49"(12.45mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	6.93"(176mm)	6.93"(176mm)				

SIZE	HOLE SIZE
4inch	4 21/64"(110mm)
6inch	6 19/64"(160mm)

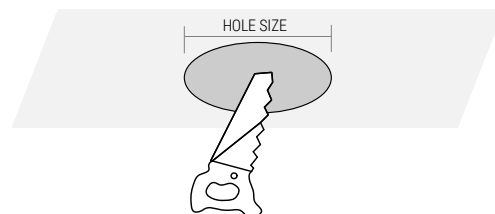

## RECOMMENDED DIMMER

LUTRON				LEVITON	
TG-600PR-WH	TGCL-153PH-LA	SCL-153PH-WH	RNL06	6672	
S-600PR-WH	SLV-600P-AL	GT-600P	MSCL-OP153M	6674	PD-6WCL
CTCL-153PDH-WH	DV-600PR-WH	DVCL-153P	IPL06	DSL06	MACL-153M//MA-R

## ACCESSORIES


PART	DESCRIPTION	QUANTITY
A	J-Box driver	1
B	Connector	3
C	Hole cutout card	1



A



B



C