


## DESCRIPTION

LED Ultra-thin night light is a fixture with modern technology, ultra-thin lamp body, and also have night Light function . It is suitable for bedrooms, kitchens, hallways ,etc.

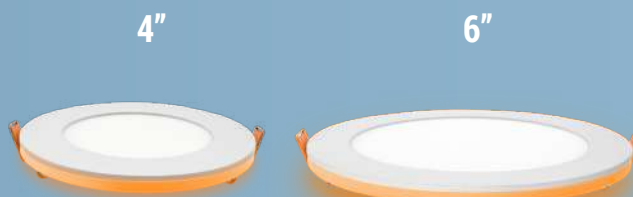

### BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
4EJCT09SR05-N	9W+3W	2700K	580Lm
		3000K	602Lm
		3500K	625Lm
		4000K	628Lm
		5000K	604Lm

→ **3W (2000K Night Light)**

MODEL#	WATTAGE	5CCT	LUMENS
6EJCT12SR05-N	12W+3W	2700K	830Lm
		3000K	897Lm
		3500K	960Lm
		4000K	1006Lm
		5000K	953Lm

→ **3W (2000K Night Light)**

## TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
MAIN LIGHT CCT	2700K   3000K   3500K   4000K   5000K
NIGHT LIGHT CCT	2000K
CRI	90
BEAM ANGLE	120°
MATERIAL	AL+PS
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45 °C
DIMMABLE	Triac Dimming
RATING	Suitable for Wet Locations
WARRANTY	5 year limited

## FEATURES

- Soft amber hue when night light mode activated
- Without recessed cans or a separate j-box
- CRI 90 for true color rendering
- No flicker

## INSTALLATION

No existing recessed housing or junction box required.  
Suitable for most new constructions.  
Install J-Box in ceiling beam, and insert light right into drywall opening.

## DIMMING

Compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.  
Please check the recommended dimmer list in next page.

## ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

## ENERGY SAVINGS


80% more energy savings than halogen lamps.

## LISTING

ETL Listed.



Catalog Number : Project Name : Note : Date : Type :

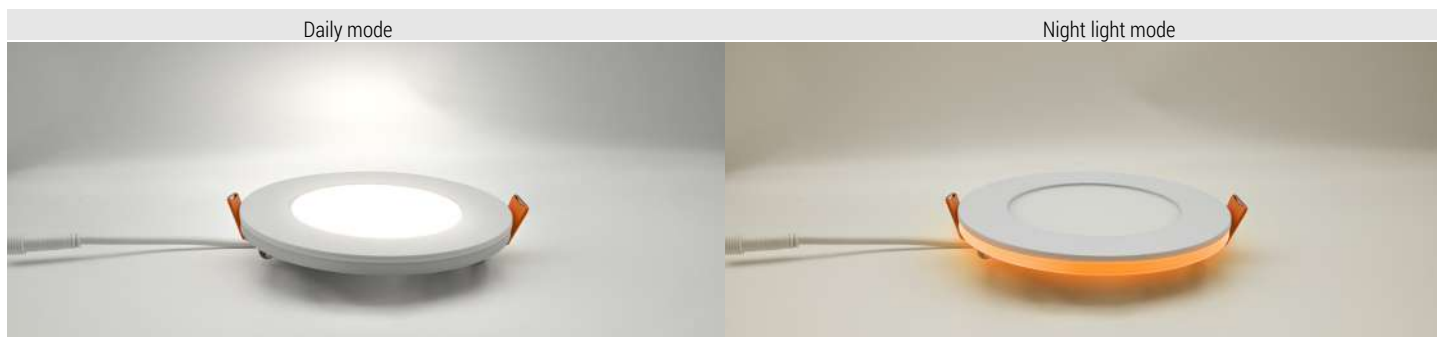

## 1.SELECTING MAIN LIGHT MODE OR NIGHT LIGHT MODE


The product has two modes: main light mode and night light mode. Main light mode provides full brightness and allows selection from five color temperatures: 2700K, 3000K, 3500K, 4000K and 5000K. Night light mode provides reduced light output at 2000K color temperature for very soft illumination at night.

## 2.CONVENIENT CONTROL USING LIGHT SWITCH

Switch the downlight off and back on again within (1-4) seconds to activate night light mode.


*NOTE: The main downlight will not provide light output when the night light trim is illuminated.*

## SIZE & DIMENSION

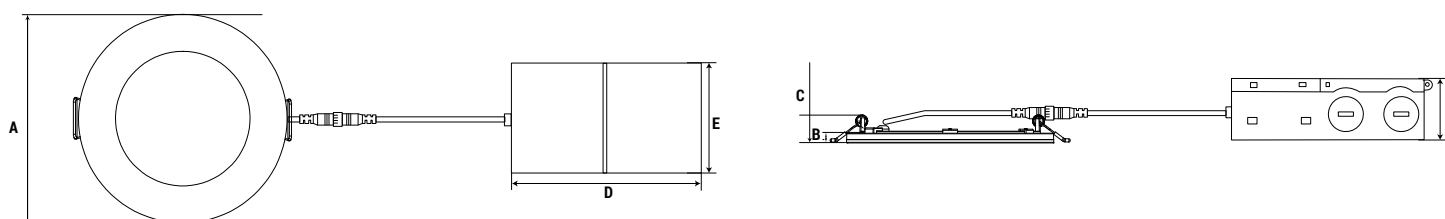

SIZE	A	B	C	D	E	F
4inch	Φ4.92"(125mm)	0.32"(8.2mm)	0.90"(22.79mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)
6inch	Φ6.89"(175mm)	0.32"(8.2mm)	0.92"(23.49mm)	4.73"(120.1mm)	2.77"(70.4mm)	1.34"(34.1mm)

## ACCESSORIES



Hole cutout card  
4inch: 4 21/64"(110mm)  
6inch: 6 19/64"(160mm)



J-Box driver



Connector

## RECOMMENDED DIMMER

LUTRON		LEVITON
TG-600PR-WH	SCL-153PH-WH	6672
S-600PR-WH	GT-600P	6674
CTCL-153PDH-WH	DVCL-153P	DSL06
TGCL-153PH-LA	PD-6WCL	RNL06
SLV-600P-AL	MSCL-OP153M	IPL06
DV-600PR-WH	MACL-153M//MA-R	