
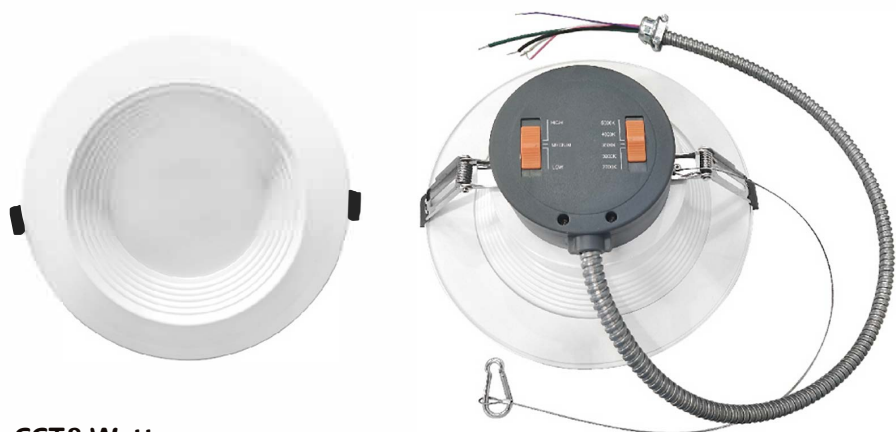


5CCT 3WATTAGE COMMERCIAL DOWNLIGHT


6inch

DESCRIPTION

- This product is available in 5 color temperatures and 3 wattage
- This product emits evenly ,without halo and shadows
- 100-277V with 0-10V dimming
- Suitable for Wet Location.
- Flicker free .
- Suitable for 2.4G intelligent control technology.
- FCC











CCT&Wattage



Selectable CCT
2700K,3000K,3500K,4000K,5000K

Selectable Wattage
12/17/22W

Installation diagram :

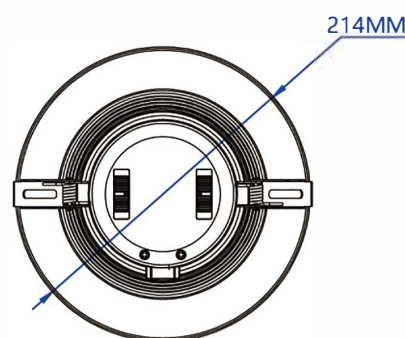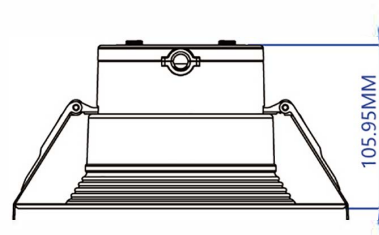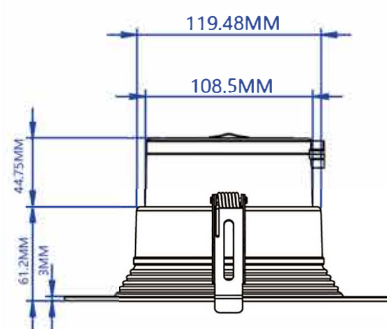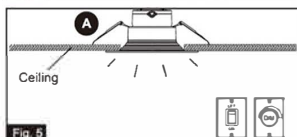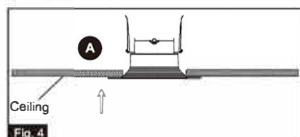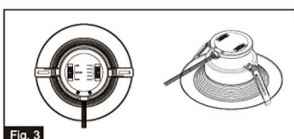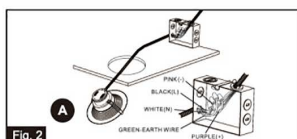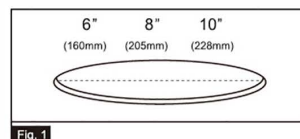

Accessories



DESCRIPTION

Wire Nuts


| SPECIFICATION | |
|----------------------|-----------------|
| Model | 6CMCT22LRyy |
| Size | 6in |
| Shape | Round |
| Watts | 12/17/22W |
| Light Output(LM) | 1080LM~2200LM |
| Color Temperature(K) | 5CCT Selectable |
| Lifetime | 50000H |
| Dimming | 0-10V Dimming |
| Approved Location | Wet Location |
| Operating Temp | -20~40°C |
| Beam | 100° |

5CCT 3WATTAGE COMMERCIAL DOWNLIGHT


8inch

DESCRIPTION

- This product is available in 5 color temperatures and 3 wattage
- This product emits evenly ,without halo and shadows
- 100-277V with 0-10V dimming
- Suitable for Wet Location.
- Flicker free .
- Suitable for 2.4G intelligent control technology.
- FCC

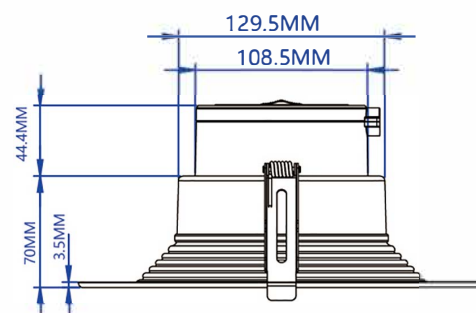








CCT&Wattage



Selectable CCT
2700K,3000K,3500K,4000K,5000K

Selectable Wattage
17/24/30W

Installation diagram:

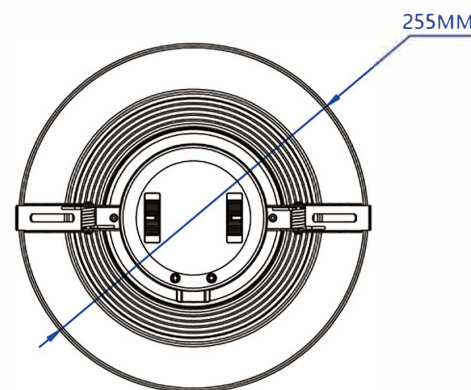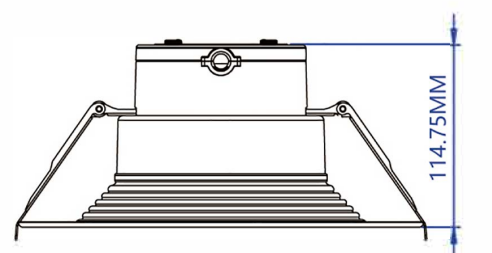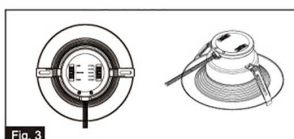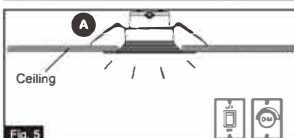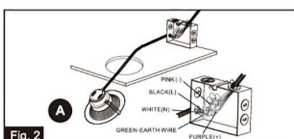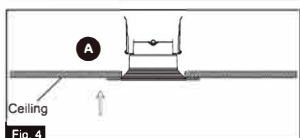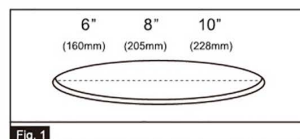

Accessories



DESCRIPTION

Wire Nuts

SPECIFICATION


| | |
|----------------------|-----------------------|
| Model | BRT-COM-8WC-1 PK-5CCT |
| Size | 8in |
| Shape | Round |
| Watts | 17/24/30W |
| Light Output(LM) | 1615LM~3150LM |
| Color Temperature(K) | 5CCT Selectable |
| Lifetime | 50000H |
| The Dimming Mode | 0-10V Dimming |
| Approved Location | Wet Location |
| Operating Temp | -20~40°C |
| Beam | 100° |

5CCT 3WATTAGE COMMERCIAL DOWNLIGHT


10inch

DESCRIPTION

- This product is available in 5 color temperatures and 3 wattage
- This product emits evenly ,without halo and shadows
- 100-277V with 0-10V dimming
- Suitable for Wet Location.
- Flicker free .
- Suitable for 2.4G intelligent control technology.
- FCC

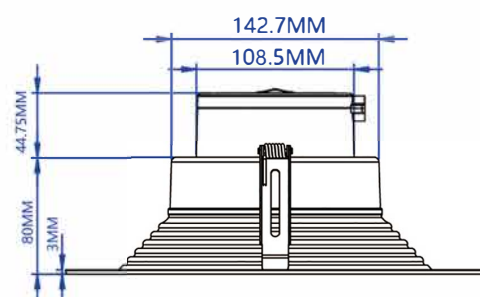


CCT&Wattage









Selectable CCT
2700K,3000K,3500K,4000K,5000K

Selectable Wattage
22/30/38W

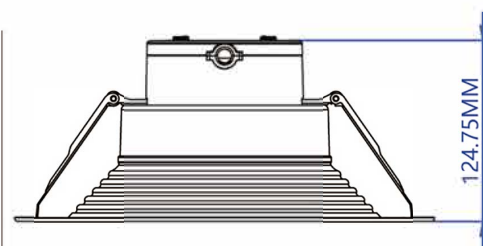

Installation diagram:

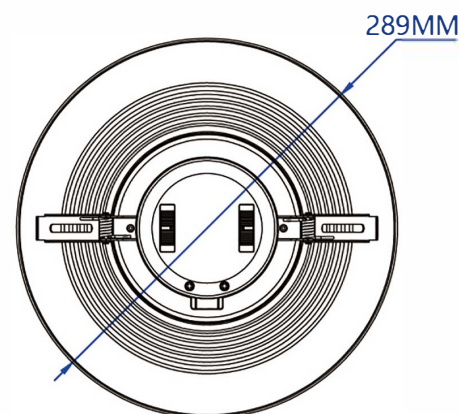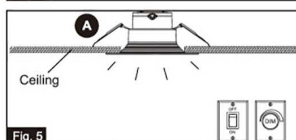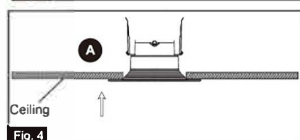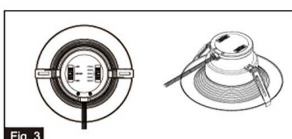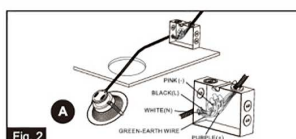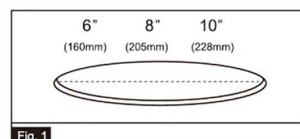

| SPECIFICATION | |
|----------------------|------------------------|
| Model | BRT-COM-10WC-1 PK-5CCT |
| Size | 10in |
| Shape | Round |
| Watts | 22/30/38W |
| Light Output(LM) | 1900LM~3800LM |
| Color Temperature(K) | 5CCT Selectable |
| Lifetime | 50000H |
| Dimming | 0-10V Dimming |
| Approved Location | Wet Location |
| Operating Temp | -20~40°C |
| Beam | 100° |

Accessories

| PART | DESCRIPTION |
|------|-------------|
| | Wire Nuts |