

# 5 CCT DISK LIGHT 6inch

## DESCRIPTION

A flexible, low cost downlight solution for new construction and recessed can LED retrofit applications. It can be installed virtually anywhere, provides true color rendering with 90+ CRI, and can be continuously dimmed to 10% with standard dimmers.

## FEATURES

- Low profile, driverless design
- Continuous dimming from 10-100% with many Triac dimmers
- Surface mounts to a standard 4" junction box
- Retrofit into an existing recessed can (hardware included in the box)






## LISTINGS

- ETL Listed for Wet locations

## PERFORMANCE

- CRI: 90+
- Flicker free
- Input voltage: 120VAC

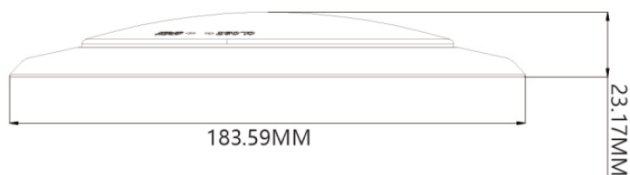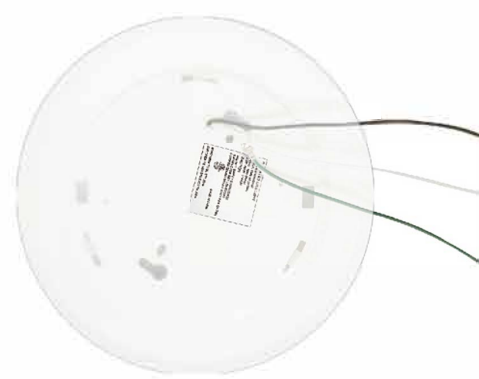

ACCESSORIES


## 2 INSTALLATION TYPES

### I. SURFACE MOUNT


#### STEP 1




#### STEP 2




#### STEP 3




#### STEP 4



#### STEP 5, 6 & 7

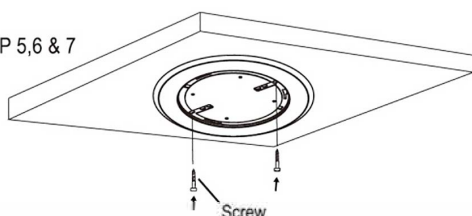


#### STEP 8

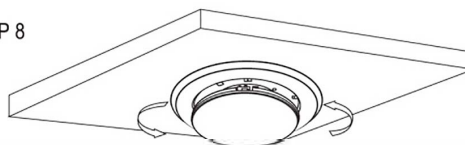


## II. RETROFIT

### STEP 1


Compatible Housing Can





### STEP 3




### STEP 4




### STEP 5




### STEP 6




### STEP 7




### STEP 8 & 9



### STEP 10

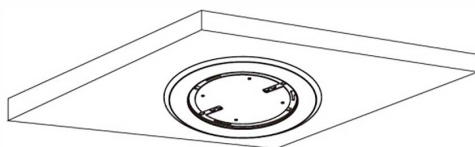

### STEP 11

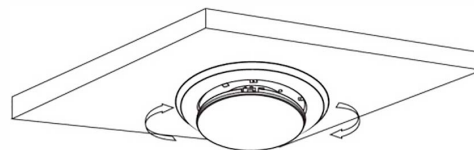

## SPECIFICATION

Model	BRT-DSK-615-1PK-XXXX
Size	6in
Shape	Round
Watts	15W
Light Output(LM)	1050LM
Color Temperature(K)	5CCT Optional : 2700K or 3000K or 3500K or 4000K or 5000K
Lifetime	50000
The Dimming Mode	Triac Dimming
Approved Location	Wet Location
Operating Temp	-20~40°C
Beam	120°