



FIXTURE TYPE:	CCT SELECTABLE INTEGRATED TUBE
NOTES:	
UPDATED DATE:	Feb, 2023

LED INTEGRATED TUBE-CCT SELECTABLE



PRODUCT OVERVIEW

BRIGHTLED new CCT selectable integrated tube keep the advantages of the integrated tube: easy installation, meanwhile, add the CCT switch. You can choose different color temperature on the same lamp according to the preferences of light and the requirements of the use environment.

KEY FEATURES

- 4 CCT Selectable.
- Full series: 2FT, 4FT, 5FT, 6FT and 8FT
- High lumen efficient 130lm/w. |
- Brackets for direct installation
- ETL,DLC5.1 listed.
- 5 years warranty.

APPLICATION






- Office/shool
- Subway&train station
- Supermarket,etc
- warehouse



PERFORMANCE SUMMARY

Construction & Materials				
Diffuser	Clear,Stripy or frosted PC cover			
Housing	aluminum			
Finish	PC cover & aluminum body			
Environmental System				
Work Environment	Suitable for dry and damp location			
Operating Temperature	-20°C to 45°C			
Parameter				
CRI	>80			
Efficacy	130lm/w			
CCT	4CCT Selectable: 3000K-4000K-5000K-6500K Or 3000K-4000K-5000K-6000K			
Input Voltage	100-277Vac; 50/60HZ			
Size/Wattage/Certification/ Max connection	2FT	15W	ETL,cETL	22PCS@120V;44PCS@220V
	4FT	24W	DLC5.1, ETL,cETL	14PCS@120V;27PCS@220V
	4FT	30W	ETL,cETL	11PCS@120V;22PCS@220V
	5FT	40W	ETL,cETL	9PCS@120V;18PCS@220V
	6FT	48W	ETL,cETL	7PCS@120V;14PCS@220V
	8FT	60W	DLC5.1, ETL,cETL	6PCS@120V;12PCS@220V
	8FT	72W	DLC5.1, ETL,cETL	4PCS@120V;9PCS@220V
Base	Integrated base			


INSTALLED OPTIONS

Image	Description	Note
	Metal clips for installation: 2FT/4FT/5FT:2PCS 6FT:3PCS;8FT:4PCS	Standard
	UL input cable,25CM	Standard
	Semaless middle hard connector	Standard
	Extend cascade cable: 1FT-10FT	Option
	UL input cable with switch	Option

ORDERING GUIDE


Example: MC-INT4F-24XX				
PRODUC	SIZE	Wattage	First X	First X
INT	4F	<input type="text" value="30"/>	C	<input type="text" value="Color/CCT"/>
INT INTEGRATED	2F 2FT 4F 4FT 15F 5FT 6F 6FT 8F 8FT	15W 24W 30W 40W 48W 60W 72W	S S= Stripy C C=Clear M M=Frosted	A 3000K B 3500K C 4000K D 5000K H 5700K E 6000K M 3000K-4000K-5000K-6000K

CUT SHEET

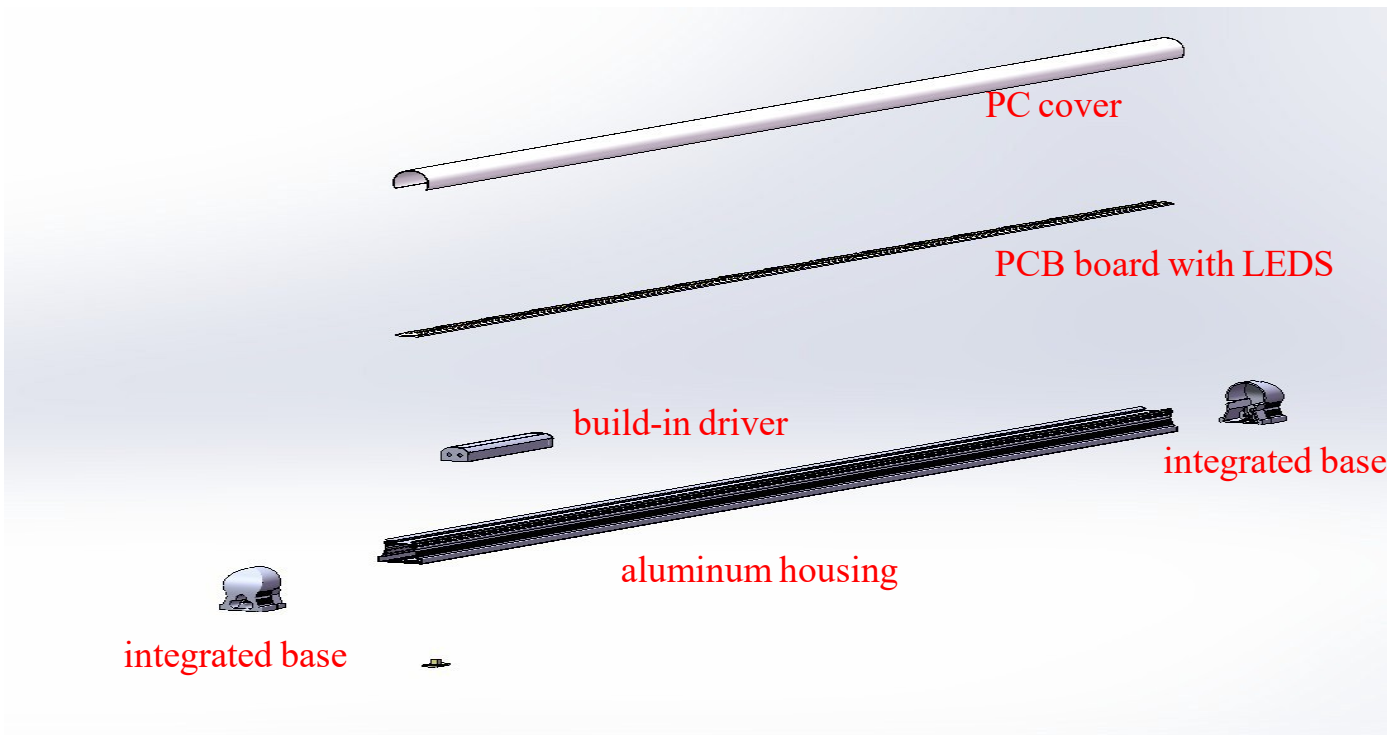


CCT tunable switch

DIMENSIONS (Unit: mm)

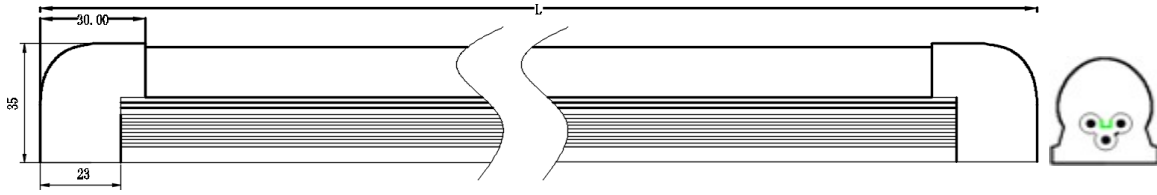

Length	Width	Height
600mm(23.6")	31mm (1.22")	35mm (1.38")
1200mm (47.2")	31mm (1.22")	35mm (1.38")
1500mm (59.1")	31mm (1.22")	35mm (1.38")
1800mm (70.9")	31mm (1.22")	35mm (1.38")
2400mm (94.5")	31mm (1.22")	35mm (1.38")

PACKAGING INFORMATION

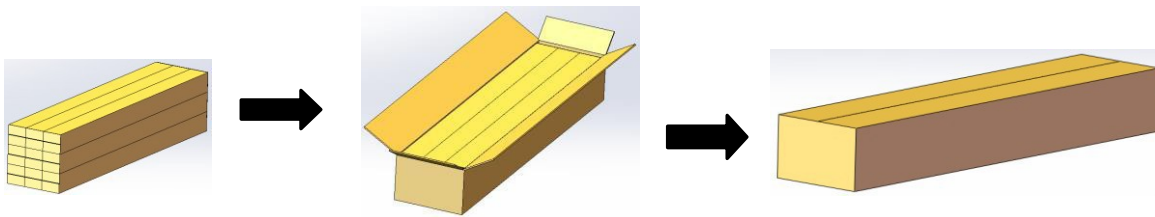

Size	Packing Detail				
	L(mm)	W(mm)	H(mm)	PC/CTN	GW(Kg)
4FT	1250	220	235	25PC	11.1kg
5FT	1520	220	235	25PC	12.5
6FT	1820	220	235	25PC	15.5
8FT	2445	220	190	20PC	13



Web: <https://brightledtx.com/>

Tel.: (281) 601-1133

ADD: 13746 Pike Rd, Missouri City, TX 77489, USA.